

All st. steel housing pressure transmitters  
 LCD white bright digital window  
 series EDN.730



RS485 communication  
 2 channel relays, switches

Glod plaed piezoresistive pressure sensors for Hydrogen H<sub>2</sub>  
 with Declaration of Conformity, CE

### General features

- Pressure range from -1...0 bar to 0...1050 bar
- Multi-functional LCD, 4 1/2-digit
- Various pressure scale units available
- Zero point, range adjustable
- 2 channe relays, switch functions [option]
- RS485 digital communication [option]

### Application area

- Semiconductor industry
- Pharmaceutical and midicine industry
- Hydraulic and pneumatic control systems
- Pressure calibration, pressure checking
- Liquid pressure system and switch

### General specification

#### Pressure ranges

From -1...0 bar, 0...1 bar to 0...1050 bar  
 Min. span range is 200 mbar.

#### Accuracy

included Linearity+Hysteresis+Repeatability  
 ± 0.35% FS

[options]

- ± 0.25% FS
- ± 0.1% FS
- ※ Less 200 mbar of gain, it could be accuracy upto 0.1%

#### Overpressure

1.3 x pressure range

#### Output signal

4...20mA, 2-wire system  
 0...10V, 0...5V, 1...5V, 0.5...4.5V, 3-wire system

#### Power supply

Available power: DC 12...30V

#### Temperature range

Temperature compensating range: 0...70 °C  
 Operating: -20...100 °C  
 -40...125 °C / option  
 Ambient: -20...100 °C  
 Storage: -40...120 °C

**Thermal error** ±0.75%FS @ 25 °C, typical  
 Zero thermal error: ±0.75%FS @ 25 °C, typical



Pressure transmitter, series EDN.730

#### Special functions [option]

- RS485 digital communication.
- 2 channe relays, switches.

#### Isolation

> 100MΩ at 100 VDC

#### Electrical connection

Flameproof cable gland / M12

#### Display

LCD, 4 1/2 - digit, -1999...9999  
 Bar graph

#### Background

Light white

#### Materials

Wetted parts: st. steel 316L  
 Body: st. steel

#### Pressure connection

G 1/4", G 3/8", G 1/2"  
 R 1/4", R 3/8", R 1/2"  
 NPT 1/4", NPT1/2"

#### Adjustable Pressure units

bar, mbar, MPa, kPa, psi, kg/cm<sup>2</sup>, mmH<sub>2</sub>O, inH<sub>2</sub>O  
 mmHg, inHg, torr, atm.

#### Operation window

Pressure ranges.  
 zero point adjustment.  
 characteristic curve and damping rate are adjustable  
 on the device.

## Technical specifications

### Input pressure range

Norminal pressure:

-1...0 bar, 0...2 bar up to 0...1050 bar

Permissible static pressure:

1.3 x pressure range, max.1100 bar

### Output signal / Supply

Current:

2 channe 4...20mA Vs=12...30 VDC

Voltage:

3-wire 0...10V, 0...5V, 1...5V Vs=12...30 VDC

### Performance

<sup>1</sup>Accuracy:  $\leq \pm 0.35\%$  FSO @ 25°C

<sup>1</sup> accuracy according to IEC 60770 - limit point adjustment including non-linearity, hysteresis as well as repeatability

Permissible load /  $R_L$

Current: 2-wire,  $R_L \text{ max} = [(V_s - V_s \text{ min}) / 0.02A] \Omega$

Voltage: 3-wire,  $R_L \text{ min} = 10k\Omega$

Influence effects:

Supply: 0.05%FSO/10V

Longterm stability:  $\leq \pm 0.5\%$ FS / year

Response time: <5ms

### Thermal effects (Offset and Span)

#### / Permissible temperatures

FS thermal error:  $\pm 0.75\%$ FS @ 25°C, typical

Zero thermal error:  $\pm 0.75\%$ FS @ 25°C, typical

Operating temperature: -20...100°C

Compensated teperature: 0...70°C

### Electrical protection

Electromagnetic compatibility:

Emission and immunity according to

EN 61326-2-3:20B CCISPR II Group 1, Class A

EN IEC 61000-3-2:2019

Insulation: the transmitter is grounded via the process connection

### Mechanical stability

Vibration: No change at 10 g RMS (20...2000) Hz

Shock: 0.1 g (1m/s) Max.

### Materials

Wetted parts: stainless steel 316L

Housing / body: stainless steel 304

Sensor diaphragm: Gold plated on Sensor Diaphragm

### Miscellaneous

Current consumption

Signal output current max. 25mA

Current

4...20mA, 2-wire system

Signal output voltage max. 7mA

Voltage:

0...10V, 0...5V, 1...5V, 0.5...4.5V, 3-wire system

Signal output voltage max. 25mA

### EMC Test report for CE conformance

■ EN 61326-2-3:2013 / Class A

■ EN 61326-2-3: 2013 / IEC 61326-1:2012

### Special features

■ Protection against reverse polarity connections ( $\pm 40VDC$ ).

■ High Noise Immunity Performance against Electrical Fast Transient (EFT) noise.

■ High Precision against variations in ambient temperature. ( $\pm 1.3\%$  in -20...70°C).

■ Wide pressure operating range.30% lower than the minimum and 30% higher than the maximum.

■ Protection against instantaneous surge voltage.


■ Durable design for severe vibration.

### Electrical connecting cable gland

■ IP65

■ Materials: Brass with nickel plated

■ Cable outer : 3.0...6.0 mm

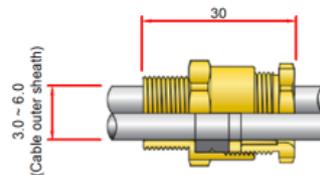

## Ordering information

Model code

EDN.730

· [ ] · [ ] · [ ] · [ ] · [ ] · [ ] · B [ ]

### Output analog signal

O1	4...20 mA / 2-wire system
O2	0...10 V / 3-wire system
O3	0...5V / 3-wire system
O4	1...5V / 3-wire system
O6	0.5...4.5V / 3-wire system

### Communication

O11 | RS485

### 2 relay channel, switches

O12 | 2 channel, switches

### Accuracy

A5	≤ 0.35 % F.S
A7	≤ 0.25 % F.S
A9	≤ 0.1 % F.S

### Electrical connection

FP	Flameproof cable gland
M	M12 plug with 12 pins

### Process connection

G2	G 1/2" (PF 1/2")
G4	G 1/4" (PF 1/4")
R2	R 1/2" (BSPT 1/2")
R3	R 3/8" (BSPT 3/8)
R4	R 1/4" (BSPT 1/4")
N2	NPT 1/2"
N4	NPT 1/4"

### Pressure range code, unit bar


Code	pressure range
R19	-1...0
R23	0...1
R26	0...1.6
R28	0...2.5
R30	0...4
R32	0...6
R33	0...10
R35	0...16
R37	0...25
R39	0...40
R41	0...60
R43	0...100
R45	0...160
R47	0...250
R50	0...400
R53	0...600
R55	0...1000
R56	0...1050
RYY	Others on request

### How to order


EDN.730.O1.A5.FP.G4.BR35

EDN.730, 0.35%, 4...20mA, Flameproof cable gland, G 1/4", 0...16 bar

## Outline drawing

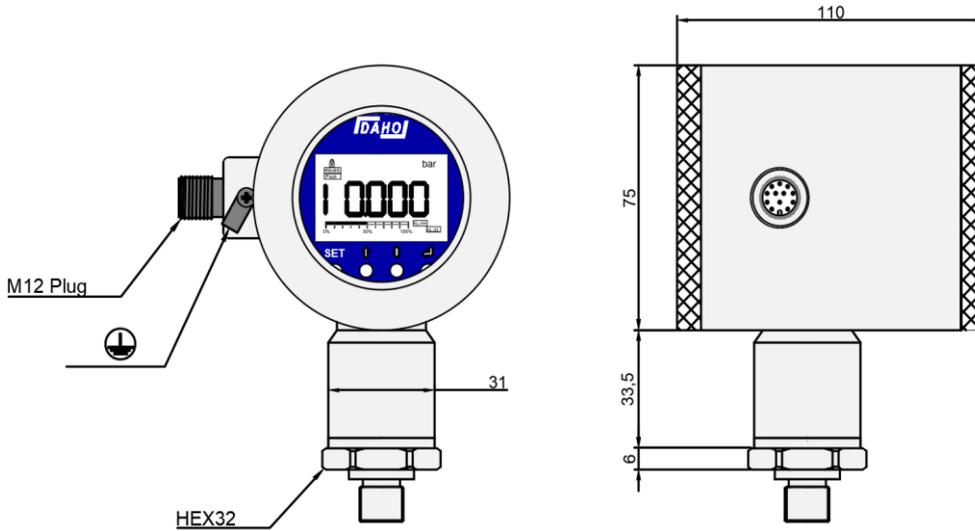


## Process connection

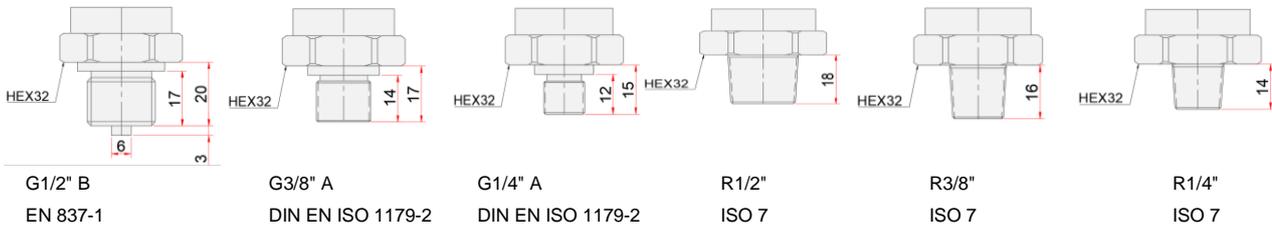


## Electrical connection Diagram

Output signal	
Pin No.	Wire
+	+Vcc
-	-Vcc
Out	+ Signal
GND	- Signal
A	RS485 A
B	RS485 B


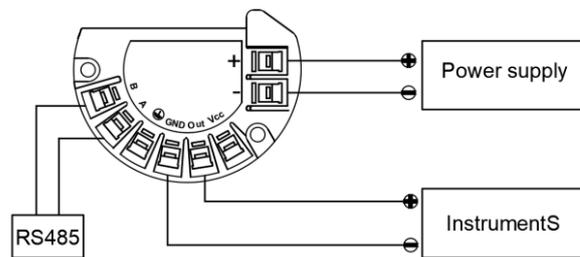


Relay	
Pin No.	2-wire
+	+Vcc
-	-Vcc
A	RS 485A
B	RS 485B
SW1	Relay 1
SW2	Relay 2
COM	Relay COM

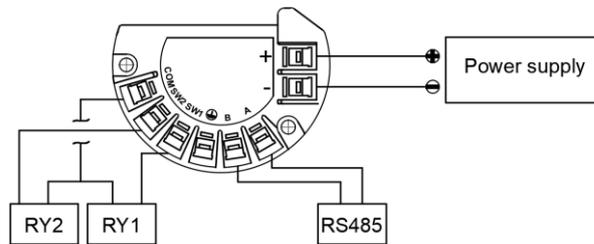

## Electrical connection Diagram



### Cable gland

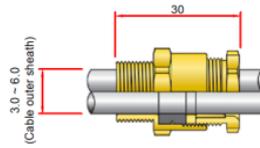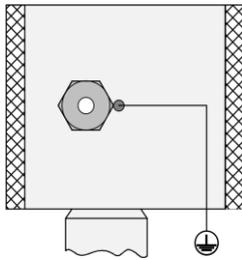

switch functions [option]


### Electrical plug, M12

#### No Output signal

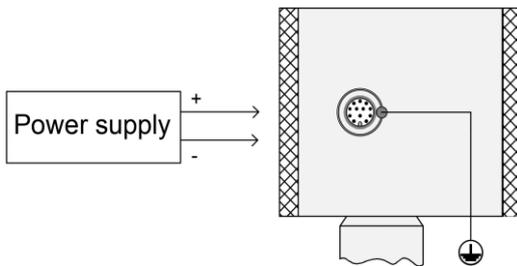


Pin No.	Wire
1	+Vcc
2	-Vcc
12	earth

#### Output signal

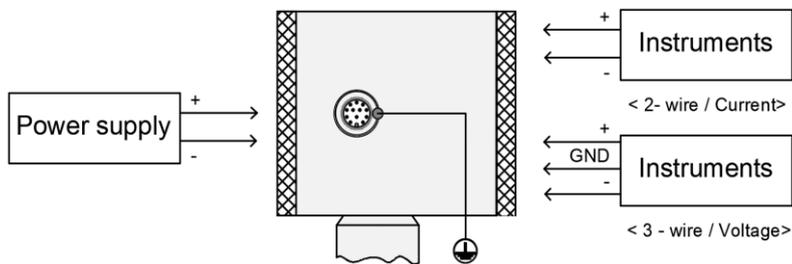


Pin No.	Current	Voltage
1	+Vcc	+Vcc
2	-Vcc	-Vcc
3	+Out	+Out
4	-Out	GND
5		-Out
12	earth	earth

#### Relay signal

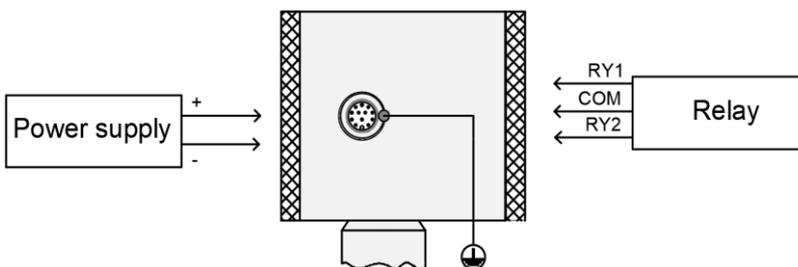

Pin No.	Wire
1	+Vcc
2	-Vcc
6	Relay 1
7	Relay 2
8	COM
12	earth

#### RS485 Communication

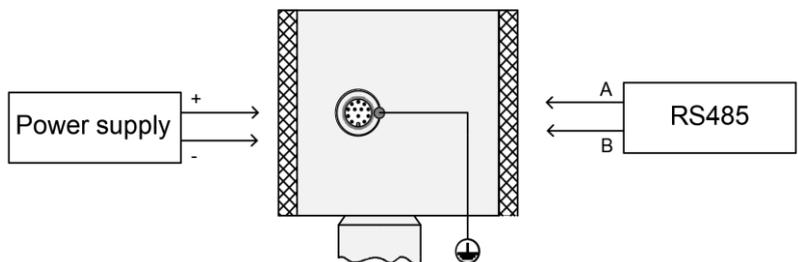

Pin No.	Wire
1	+Vcc
2	-Vcc
9	RS 485A
10	RS 485B
12	earth