

**All st. steel pressure transmitters
with gold plated sensors
for hydrogen application.
LCD white bright digital window
series EDN.730**

*All stainless steel housing & wetted parts
RS485 communication
2 channel relays, switches
Gold plated piezoresistive pressure sensors for Hydrogen H₂
with Declaration of Conformity, CE*



General features

- Pressure range from -1...0 bar to 0...1050 bar
- Multi-functional LCD, 4 1/2-digit
- Various pressure scale units available
- Zero point, range adjustable
- 2 channel relays, switch functions [option]
- RS485 digital communication [option]

Application area

- Semiconductor industry
- Pharmaceutical and medicine industry
- Hydraulic and pneumatic control systems
- Pressure calibration, pressure checking
- Liquid pressure system and switch

General specification

Pressure ranges

From -1...0 bar, 0...1 bar to 0...1050 bar
Min. span range is 200 mbar.

Accuracy

included Linearity+Hysteresis+Repeatability

Accuracy code:

- A4: ≤ 0.5% FS
- A7: ≤ 0.25% FS
- A9: ≤ 0.1% FS in case of span range ≥ 200 mbar

Overpressure 1.3 x pressure range

Output signal

- 4...20mA, 2-wire system
- 0...10V, 3-wire system
- 0...5V, 3-wire system
- 1...5V, 3-wire system
- 0.5...4.5V, 3-wire system

Power supply

Available power: DC 12...30V

Isolation > 100MΩ at 100 VDC

Electrical connection Flameproof cable gland / M12

Display LCD, 4 1/2
digit, -1999...9999
Bar graph

Background white back light



Pressure transmitter, series EDN.730

Temperature range

Temperature compensating range: 0...70 °C
Operating: -20...100 °C
-40...125 °C / option
Ambient: -20...100 °C
Storage: -40...120 °C

Thermal error ±0.75%FS @ 25 °C, typical
Zero thermal error: ±0.75%FS @ 25 °C, typical

Special functions [option]

- RS485 digital communication.
- 2 channel relays, switches.

Materials

Wetted parts: st. steel 316L
Body: st. steel

Pressure connection

G 1/4", G 3/8", G 1/2"
R 1/4", R 3/8", R 1/2"
NPT 1/4", NPT1/2"

Adjustable Pressure units

bar, mbar, MPa, kPa, psi, kg/cm², mmH₂O, inH₂O
mmHg, inHg, torr, atm.

Operation window

Pressure ranges.
zero point adjustment.
characteristic curve and damping rate are adjustable
on the device.



DAHO Tronic Limited
Tel: 02-865-7001 Fax: 02-865-7309
mail: info@daho.co.kr

STX W-Tower 209
Gyeongin-ro 53 Gil 90 Guro-gu
Seoul 08215 Korea

www.daho.co.kr

Technical specifications

Input pressure range

Norminal pressure:

-1...0 bar, 0...2 bar up to 0...1050 bar

Permissible static pressure:

1.3 x pressure range, max.1100 bar

Output signal / Supply

Current:

2-wire 4...20mA $V_s=12...30$ VDC

Voltage:

3-wire 0...10V, 0...5V, 1...5V $V_s=12...30$ VDC

Performance

¹Accuracy: $\leq \pm 0.35\%$ FSO @ 25°C

¹ accuracy according to IEC 60770 - limit point adjustment including non-linearity, hysteresis as well as repeatability

Permissible load / R_L

Current: 2-wire, $R_L \max=[(V_s-V_s \min)/0.02A]\Omega$

Voltage: 3-wire, $R_L \min=10k\Omega$

Influence effects:

Supply: 0.05%FSO/10V

Longterm stability: $\leq \pm 0.5\%$ FS / year

Response time: <5ms

Thermal effects (Offset and Span) / Permissible temperatures

FS thermal error: $\pm 0.75\%$ FS @ 25°C, typical

Zero thermal error: $\pm 0.75\%$ FS @ 25°C, typical

Operating temperature: -20...100°C

Compensated teperature: 0...70°C

Electrical protection

Electromagnetic compatibility:

Emission and immunity according to

EN 61326-2-3:20B CCISPR II Group 1, Class A

EN IEC 61000-3-2:2019

Insulation: the transmitter is grounded via the process connection

Mechanical stability

Vibration: No change at 10 g RMS (20...2000) Hz

Shock: 0.1 g (1m/s) Max.

Materials

Wetted parts: stainless steel 316L

Housing / body: stainless steel 304

Sensor diaphragm: Gold plated on Sensor Diaphragm

Miscellaneous

Current consumption

Signal output current max. 25mA

Current

4...20mA, 2-wire system

Signal output voltage max. 7mA

Voltage:

0...10V, 0...5V, 1...5V, 0.5...4.5V, 3-wire system

Signal output voltage max. 25mA

EMC Test report for CE conformance

■ EN 61326-2-3:2013 / Class A

■ EN 61326-2-3: 2013 / IEC 61326-1:2012

Special features

■ Protection against reverse polarity connections (± 40 VDC).

■ High Noise Immunity Performance against Electrical Fast Transient (EFT) noise.

■ High Precision against variations in ambient temperature. ($\pm 1.3\%$ in -20...70°C).

■ Wide pressure operating range.30% lower than the minimum and 30% higher than the maximum.

■ Protection against instantaneous surge voltage.


■ Durable design for severe vibration.

Electrical connecting cable gland

■ IP65

■ Materials: Brass with nickel plated

■ Cable outer : 3.0...6.0 mm



Ordering information

Model code

EDN.730

· [] · [] · [] · [] · [] · [] · B []

Accuracy

A4	≤ 0.5 % F.S
A7	≤ 0.25 % F.S
A9	≤ 0.1 % F.S

Output analog signal

O1	4...20 mA / 2-wire system
O2	0...10 V / 3-wire system
O3	0...5V / 3-wire system
O4	1...5V / 3-wire system
O6	0.5...4.5V / 3-wire system

Communication

O11	RS485
-----	-------

2 relay channel, switches

O12	2 channel, switches
-----	---------------------

Electrical connection

FP	Flameproof cable gland
M	M12 plug with 12 pins

Process connection

G2	G 1/2" (PF 1/2")
G4	G 1/4" (PF 1/4")
R2	R 1/2" (BSPT 1/2")
R3	R 3/8" (BSPT 3/8)
R4	R 1/4" (BSPT 1/4")
N2	NPT 1/2"
N4	NPT 1/4"

Pressure range code, unit bar


Code	pressure range
R19	-1...0
R23	0...1
R26	0...1.6
R28	0...2.5
R30	0...4
R32	0...6
R33	0...10
R35	0...16
R37	0...25
R39	0...40
R41	0...60
R43	0...100
R45	0...160
R47	0...250
R50	0...400
R53	0...600
R55	0...1000
R56	0...1050
RYY	Others on request

How to order


EDN.730.A4.O1.FP.G4.BR35

EDN.730, 0.5%, 4...20mA, Flameproof cable gland, G 1/4", 0...16 bar

Outline drawing

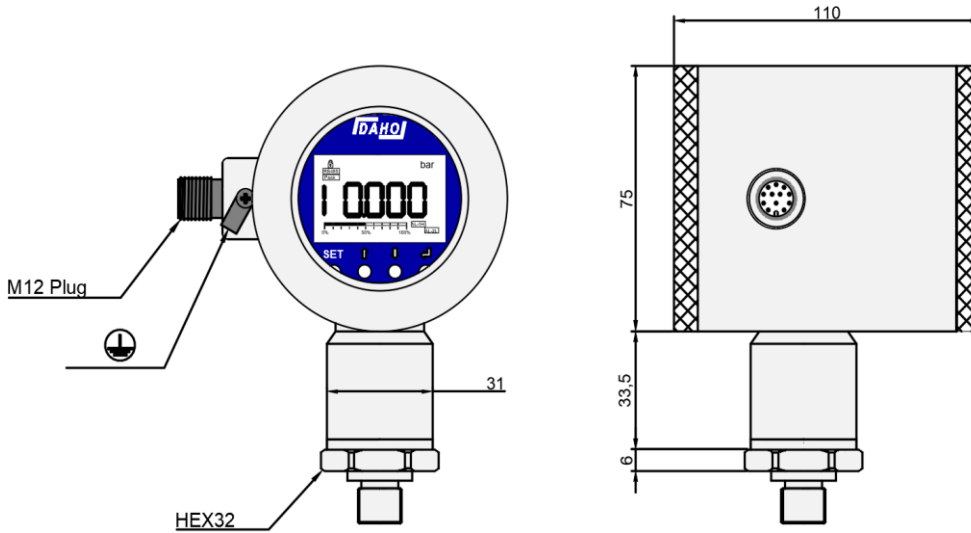


Process connection

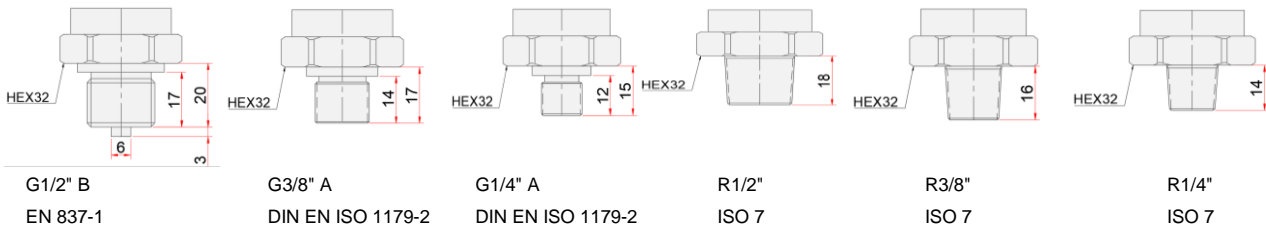


Electrical connection Diagram

Output signal	
Pin No.	Wire
+	+Vcc
-	-Vcc
Out	+ Signal
GND	- Signal
A	RS485 A
B	RS485 B

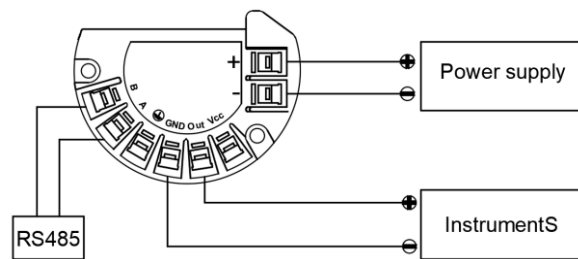


Relay	
Pin No.	2-wire
+	+Vcc
-	-Vcc
A	RS 485A
B	RS 485B
SW1	Relay 1
SW2	Relay 2
COM	Relay COM

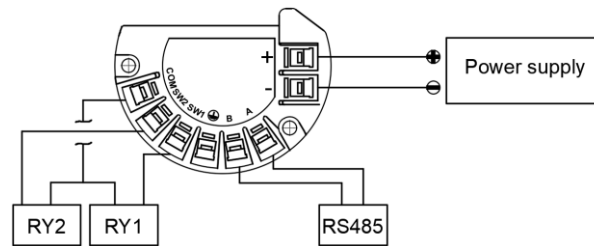



Electrical connection Diagram

Cable gland

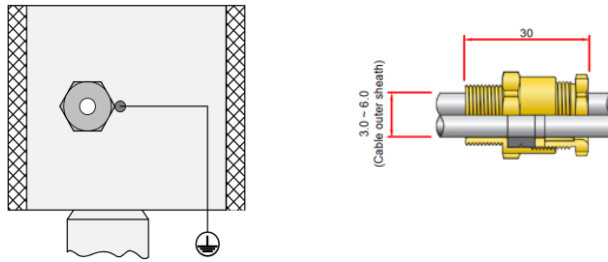



Electrical plug, M12

No Output signal

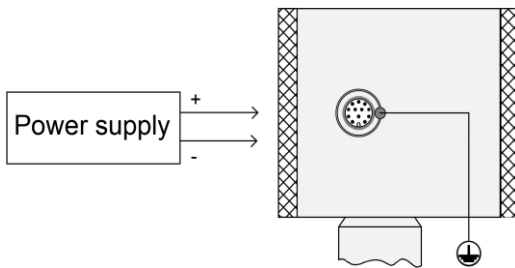



Pin No.	Wire
1	+Vcc
2	-Vcc
12	earth

Output signal

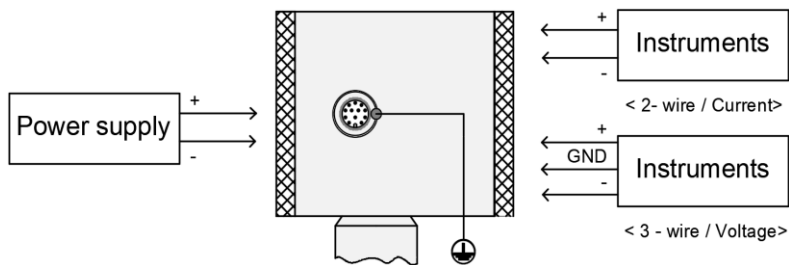



Pin No.	Current	Voltage
1	+Vcc	+Vcc
2	-Vcc	-Vcc
3	+Out	+Out
4	-Out	GND
5		-Out
12	earth	earth

Relay signal

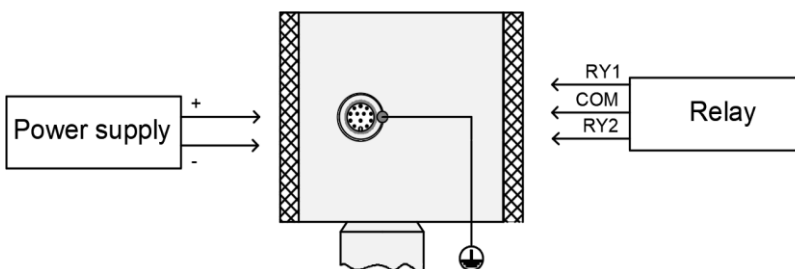

Pin No.	Wire
1	+Vcc
2	-Vcc
6	Relay 1
7	Relay 2
8	COM
12	earth

RS485 Communication

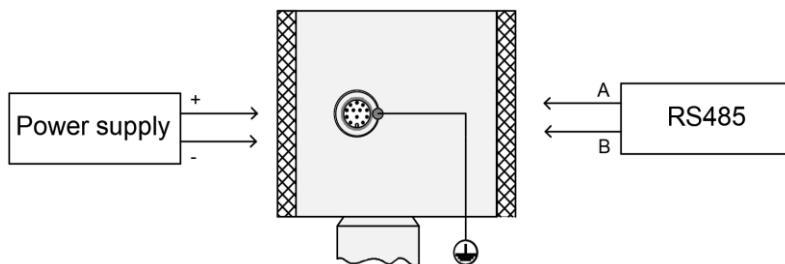

Pin No.	Wire
1	+Vcc
2	-Vcc
9	RS 485A
10	RS 485B
12	earth